


Texture System for Off-Form Concrete

All Substrate expansion, control and movement joints must be continued through the render system

Wall straightness (+ or -) 5mm over 3M Straight Edge

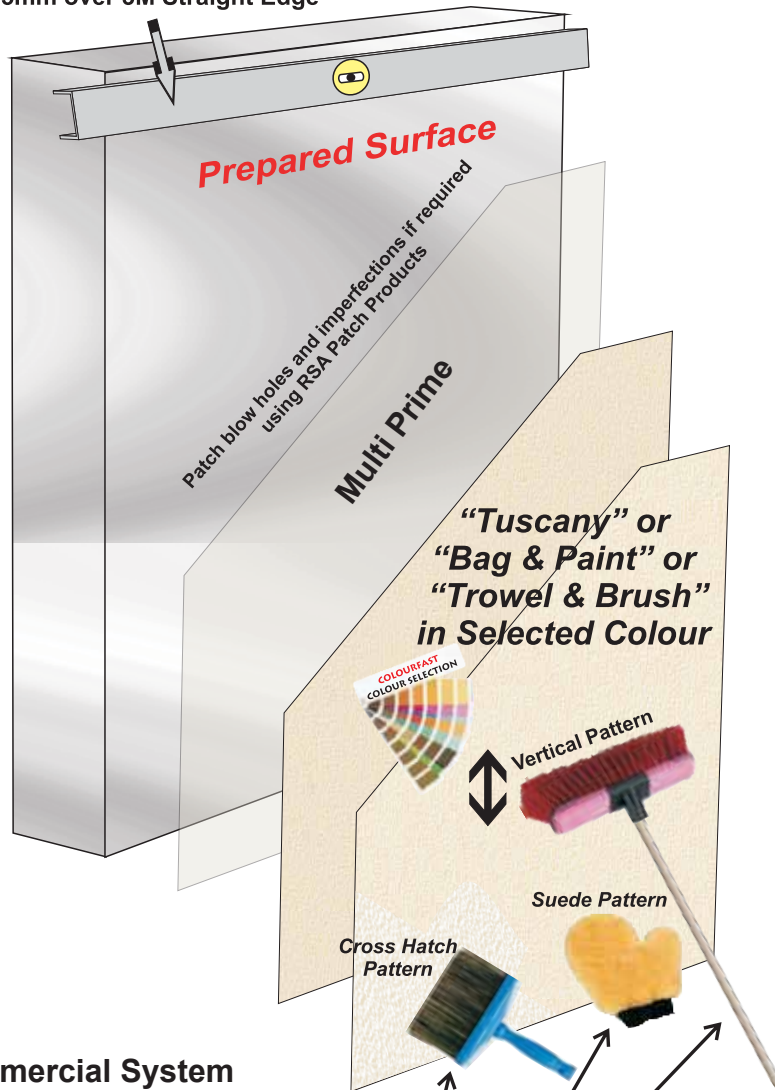

+ Commercial System Level of Splatter and Tipped Finecoat.

Finishing options

Imperfections in the substrate will be reduced by this coating system; however under normal and critical lighting conditions substrate imperfections may still be noticeable. On brick or block surfaces mortar joints will be visible through the coating system at all times. Where these features are not desirable another RSA coating system should be selected.

| Technical and Aesthetic Rating | | |
|---|--|-------------------------|
| Flexibility (crack resistance) 5/10 | Aesthetics (render straightness) N/A | Water Tightness 5/10 |

RSA offers a 7 Year Product Warranty provided:-

1. All substrates are installed in accordance with manufacturer specifications, Australian Standards and Good Trade Practices.
2. All products and processes as detailed above are applied by an RSA preferred contractor and in accordance with RSA Data Sheets, Application Information and Good Trade Practices. For further information visit: www.renderystemsaustralia.com.au or Tel. (07) 3287 6444
We reserve the right to alter the above specifications at any time, without prior notice.
3. Guidelines Only – Please refer to RSA Product Data Sheets and Application Guidelines